



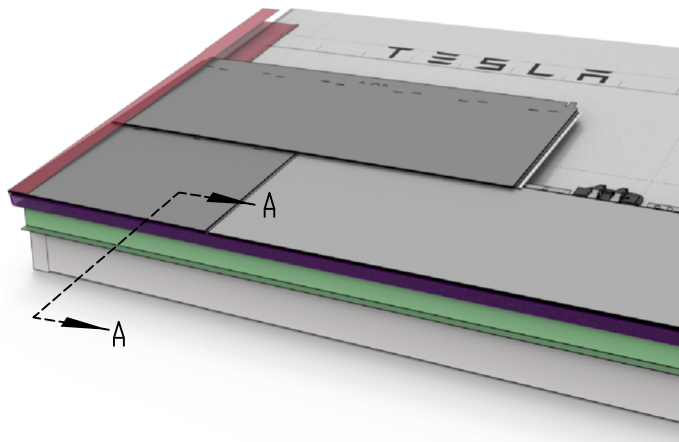

ISOMETRIC

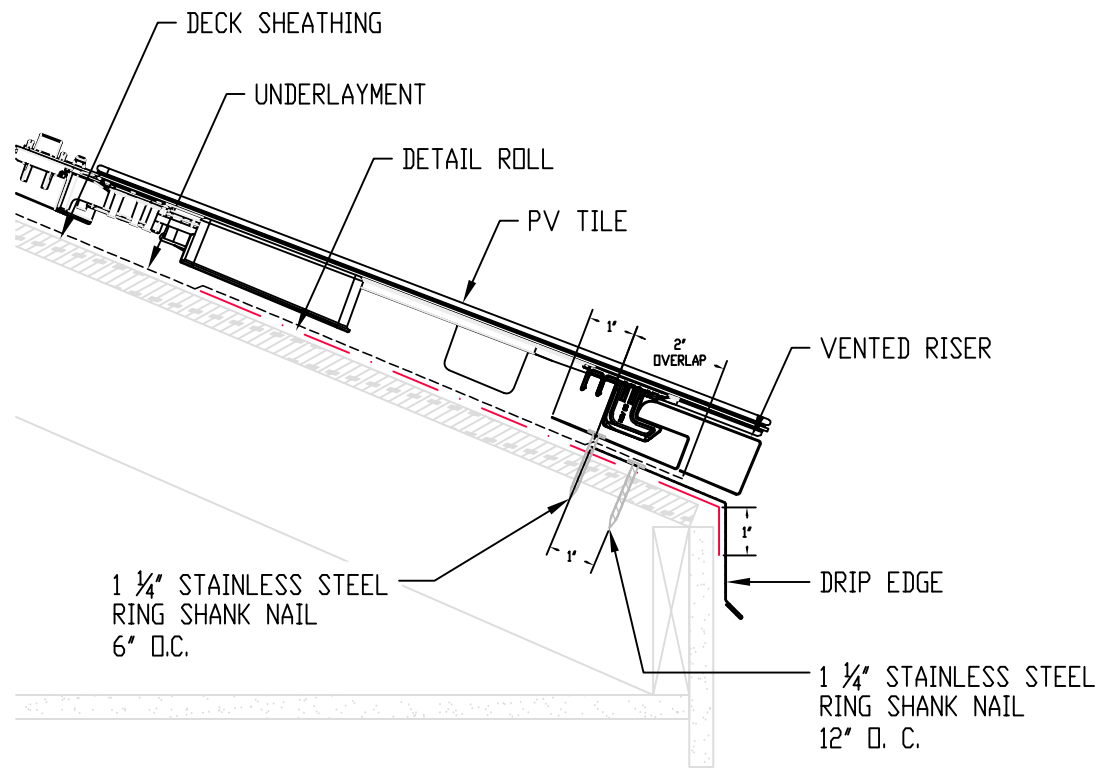

SECTION A-A

NOTES

1. DETAIL TO BE USED IN CONJUNCTION WITH TESLA GENERAL REQUIREMENTS, APPLICATION METHODS AND APPROVED DETAILS.
2. A ROOF PITCH OF 5:12 IS ILLUSTRATED.
3. DETAIL ROLL EXTENDS 1-INCH DOWN THE FACE OF THE FASCIA.
4. FIELD UNDERLAYMENT OVERLAPS ONTO DRIP EDGE. ALIGN UNDERLAYMENT ONTO THE NOTCH INDICATED ON THE DRIP EDGE, WHICH IS 1-INCH FROM THE EDGE.
5. FASTENING REQUIREMENTS FOR HIGH WIND ENVIRONMENT WITH WIND SPEED BETWEEN 121-180 MPH ARE DIFFERENT THAN STANDARD APPLICATION. REFER TO SOLAR ROOF INSTALLATION MANUAL- FASTENING SCHEDULE.

TESLA

THIS DRAWING IS AN INSTRUMENT OF SERVICE AND IS PROVIDED FOR INFORMATIONAL USE ONLY.
USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR TESLA DETAIL.
PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.
THIS DRAWING IS NOT TO BE USED OR RELIED UPON BY ANYONE AS A SUBSTITUTE
FOR PROFESSIONAL ENGINEERING DESIGN AND DOCUMENTATION REQUIRED BY
BUILDING CODE, CONTRACT, OR APPLICABLE LAW.

TITLE

EAVE
AT PV TILE

DRAWING NUMBER	REVISION	SCALE	DWN	CHK	ISSUE DATE
2070220-02-A	1	3" = 1'-0"	JM		2023-04-15